




SCREEN PRINTING


PRE-PRESS SUPPLIES

CAPILLARY FILMS

Diazofilm is a pre-sensitised diazo photofilm for use with solvent-based and UV inks. It combines all the advantages of an indirect film (regular layer and high definition) with those of a direct emulsion.

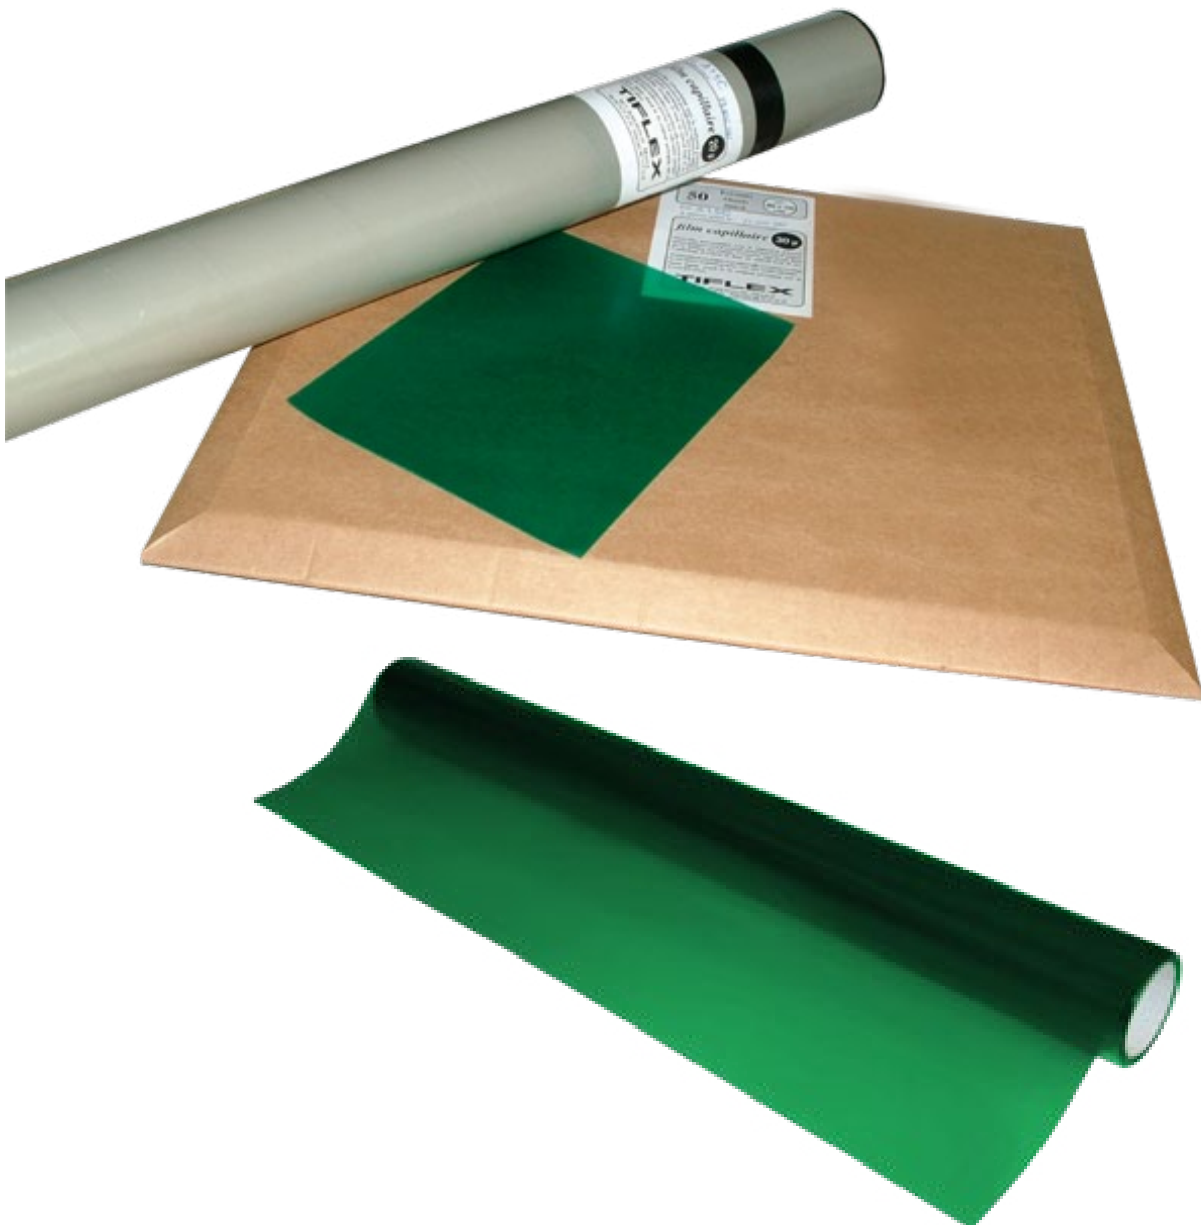

Diazo film is made of a 20 or 30-micron thick emulsion, laid on a 75-micron polyester carrier.

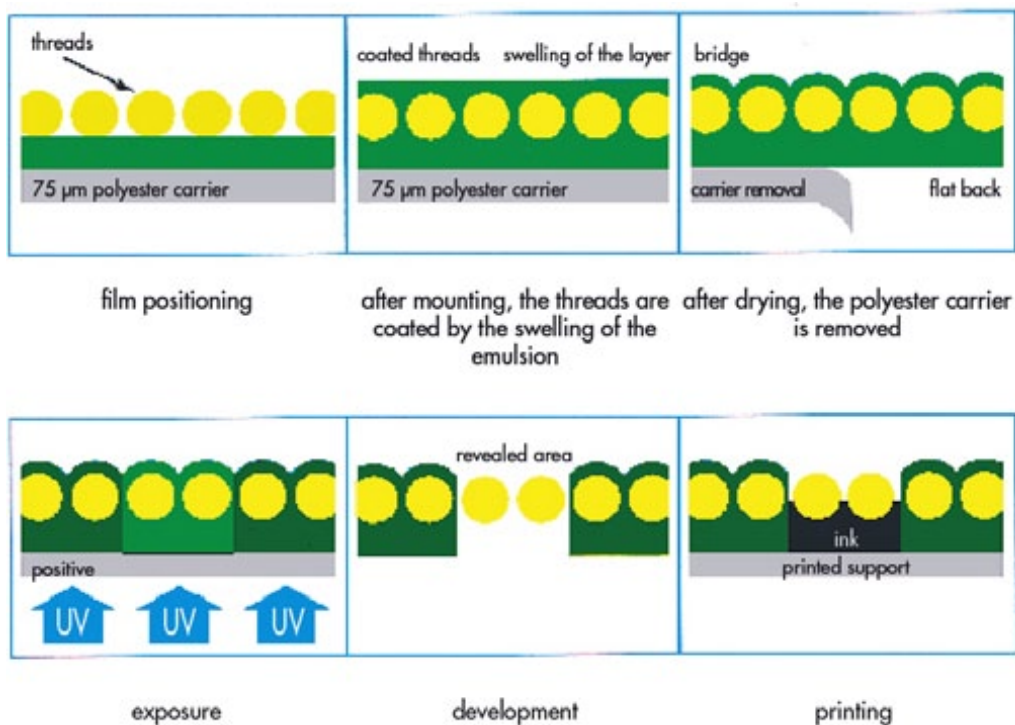

Its use is simple, quick and clean. The film is mounted by capillarity after wetting both sides of the screen.

To obtain a good quality mounting of the Diazo film, it is necessary to pre-treat the material with **Prep'écran** (ref. 2544042) (see page : Products for screen manufacturing).

This film offers excellent definition, great solidity and a perfect dimensional stability.

The reclamation of screens exposed with Diazo film is easy with **Oxygel**, **Oxysol*** or **Oxylic** screen reclaimer followed by a final high pressure wash out.

Diazo film (20-micron ref. 2051200N or 30-micron ref. 2051600N) is packaged in 10 x 1,04 m rolls.

• Thick capillary film

Used for printing graphical effects on material, this film will set large volumes of ink into a regular layer. It is available in 2 thicknesses: 200 microns (ref. 2042010) and 400 microns (ref. 2044010), or in boxes of 10 in the following sizes: 43 x 61 cm.



*Oxysol : Oxidising solid, Category 1 ; Skin corrosion, Category 1B ; Specific target organ toxicity (repeated exposure), Category 1 ; Hazardous to the aquatic environment - Acute hazard, Category 1