



SCREEN PRINTING

SOLVENT INK

XE 880, ETCHING RESIST INK


This ink withstands chemical etching baths and is removable with solvents.

We recommend you to print a homogeneous ink film (mesh 90 threads/cm) to obtain a significant resistance to engraving.

Ink will be removed with solvent 4909.*

* 4909 : Flammable liquid, Category 3 ; Specific target organ toxicity (single exposure), Category 3 ; Aspiration hazard, Category 1 ; Hazardous to the aquatic environment - Chronic hazard, Category 2

STANDARD COLOURS	Ref. 1 kg
Noir XE 880, etching resist ink	3512020

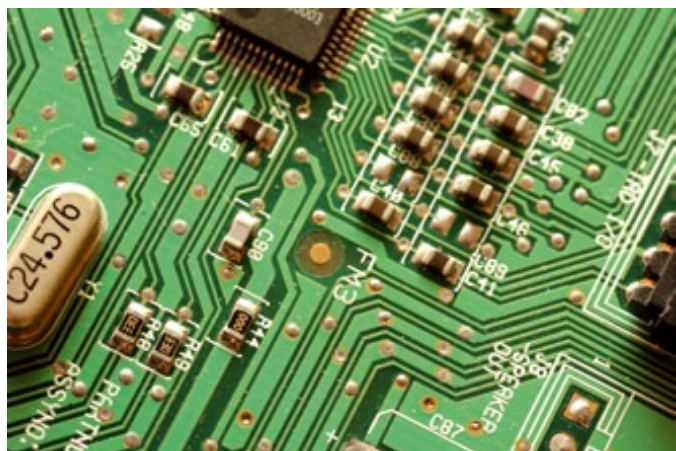

IMP. TIFLEX 01.01.2018 - Non contractual colours and pictures - Only our Web-site is authorised to give real-time information about our inks. Paper notices are considered unwritten and no longer engage our company's responsibility once they are updated on our Web-site. Our responsibility can be engaged only if the customer has based his position on the information published on our Web-site. In all cases, the user should carry out validation tests under his own conditions before using our inks for his production. The safety data sheets are available free at: www.tiflex.com/fr



CS 30200 - 01450 PONCIN - Tél. +33 (0) 4 74 37 33 80/97
international@tiflex.fr - www.tiflex.com